

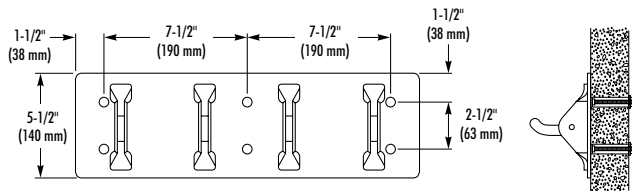


# SECURITY CLOTHES HOOK STRIP

- Model SA38 – Chase Mounted
- Model SA39 – Front Mounted **Bradex™**

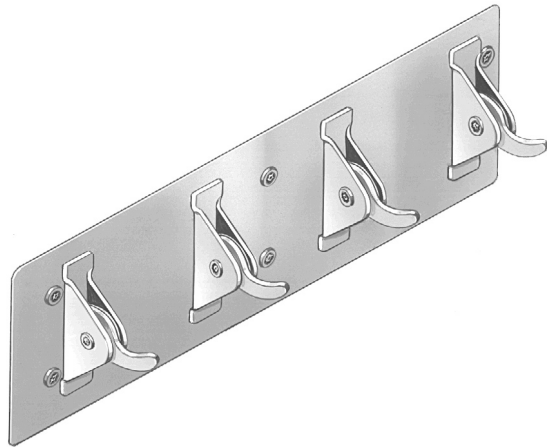

MODEL SA38

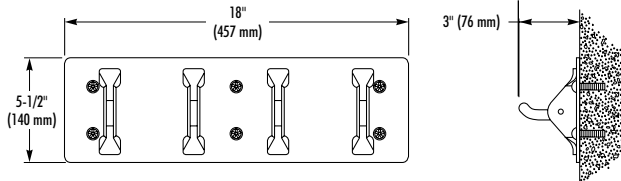

MODEL SA39

**MODEL SA38**  
**SA39**

## CONSTRUCTION:

Backplate is fabricated of type 304 (18-8), 14 gauge stainless steel with exposed surfaces in architectural satin finish with rounded corners and smooth edges.

## SAFETY HOOK:

Fabricated of type 304 (18-8), 11 gauge stainless steel bracket with 7 gauge stainless steel hook. Hook is secured to bracket by torx-head screw and rubber friction washers. Tension adjustment made by use of torx driver (available as option.)

- MODEL SA38:** Backplate has welded anchor nuts to receive 1/4"-20 studs (provided). Nuts and washer included with unit.
- MODEL SA39:** Unit supplied with 1" x 1/4"-20 torx-head screws for installation to wall anchors (not included).

WALL THICKNESS (must check one)	
<input type="checkbox"/> Up to 1"	<input type="checkbox"/> 1" to 6"
<input type="checkbox"/> 8"	<input type="checkbox"/> Over 8", Specify Thickness: _____
WALL TYPE (must check one)	
<input type="checkbox"/> Concrete	<input type="checkbox"/> Block
<input type="checkbox"/> Steel	<input type="checkbox"/> Other: _____

Document No. 9260

This information is subject to change without formal notice.  
1299RSSCJ

Orders composed of products indicated as **Bradex™** will be available to ship in one week after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-253-4161  
Web Site: <http://www.bradleycorp.com>  
Technical Information Fax Service: 1-800-BRADFAX