



☐ Model 661 – One Soap Valve

☐ Model 662 - Two Soap Valves

Shelf-Type Dispenser

Surface-Mounted

ADA Compliant

### **Product Materials**

**HINGED SHELF:** 20 gauge stainless steel with exposed surfaces in architectural satin finish.

**RESERVOIR:** 20 gauge stainless steel with exposed surfaces in architectural satin finish. Welded seams.

**SOAP VALVE:** chrome-plated brass housing with ABS plastic mechanism. Requires less than 5 lbs. of force to dispense soap.

### Capacity

80-oz. liquid soap.

### **Operation**

Pump-type valve draws liquid soap from bottom of reservoir. Dispenses measured amount of soap with each stroke. Sight gauge indicates refill time. Hinged shelf secured by concealed friction latch and 2 locking bars. Requires less than 5 lbs. of force to dispense soap.



#### Installation

Verify all rough-in dimensions prior to installation. Secure dispenser with mounting screws (included). If mounted under a horizontal projection, allow 5" clearance for filling

## **Guide Specification**

Shelf-type soap dispenser shall be fabricated of 20 gauge stainless steel. Soap valve has chrome-plated brass housing with ABS plastic mechanism. Concealed friction latch for cover. Requires less than 5 lbs. of force to dispense soap. Capacity: 80-oz. liquid soap.

Overall dimensions: 17½"W x 3¼"H x 5¼"D.




# **& ADA Compliant**

Consult local and national accessibility codes for proper installation guidelines.

Conformity and compliance to local and national codes is the responsibility of the installer.



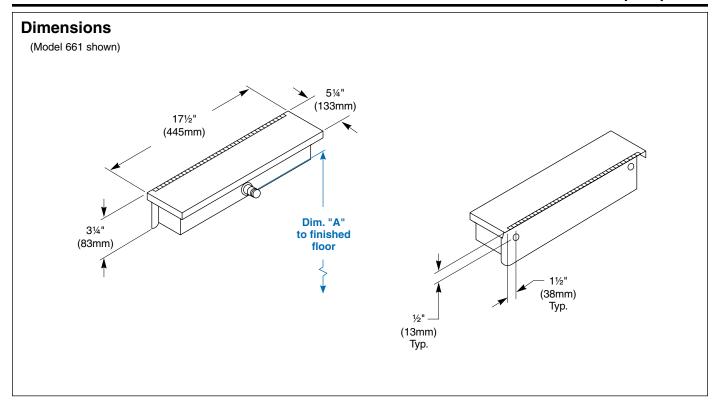

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	42¼" (1073mm)	38 <sup>13</sup> /16" (986mm)
	38" (965mm)	40¼" (1022mm)	36 <sup>13</sup> / <sub>16</sub> " (935mm)
	36" (914mm)	38¼" (972mm)	34 <sup>13</sup> / <sub>16</sub> " (884mm)
	34" (864mm)	36¼" (921mm)	32 <sup>13</sup> / <sub>16</sub> " (833mm)
Rough wall opening:			
Surface Mount:	No rough wall opening, see overall dimensions		