

## **Product Materials**


**CORNER GUARD:** 18 gauge stainless steel with exposed surfaces in architectural satin finish. Exposed edges and corners are rounded. No sharp corners.

## Installation

Verify all rough-in dimensions prior to installation. Unit is furnished with special adhesive backing for permanent mounting. Wall surface must be clean and dry. Remove paper backing from adhesive. Press corner guard firmly to wall. Wall temperature should not be less than 70°F for proper installation.

## **Guide Specification**

Corner guard shall be fabricated of 18 gauge stainless steel with exposed surfaces in satin finish. Corners and edges to be rounded and have adhesive strips for permanent installation.

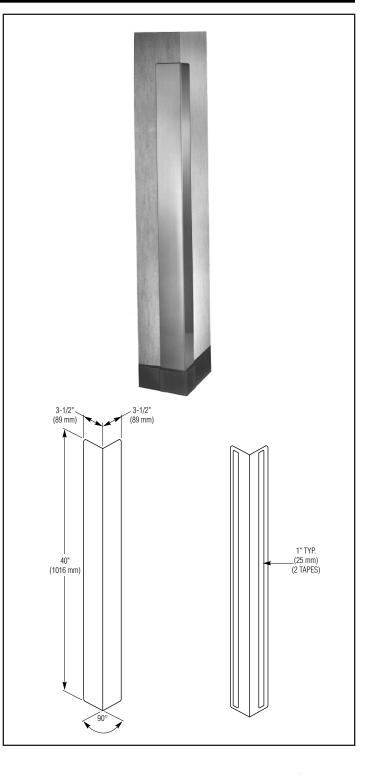

© 2015 Bradley P.O. Box 309. Menomonee Falls. WI 53052-0309 800 BRADLEY (800 272 3539)

+1 262 251 6000 bradleycorp.com

Page 1 of 1 9/30/2008 This information is subject to change without notice. Bradley\_CornerGuard\_991